



Sensor assembled with Lever

Product S	ensor Type	Engine Type S	ensor 1 S	ensor 2 I	VS1 I	VS2 D	rw
Sensor assembled with Lever							
A2C59513193	2x analog	0	.75 - 3.93 V	0.375 - 1.965 V			N
A2C59513591	PWM	Caterpillar	PWM 15% - 85% 500Hz				
A2C59515079	1x analog, 1x switch	0	.5 - 4.5 V	1	.15V NC		
A2C59515502	2x analog	0	.5 - 4.5 V 4	.5 - 0.5 V			
A2C59516775	1x analog, 1x switch P	erkins	0.4 - 4V	0	.6V, NC		
A2C59516925	2x analog	0	.5 - 4.5 V 0	.5 - 4.5 V			

Dimensions [mm]

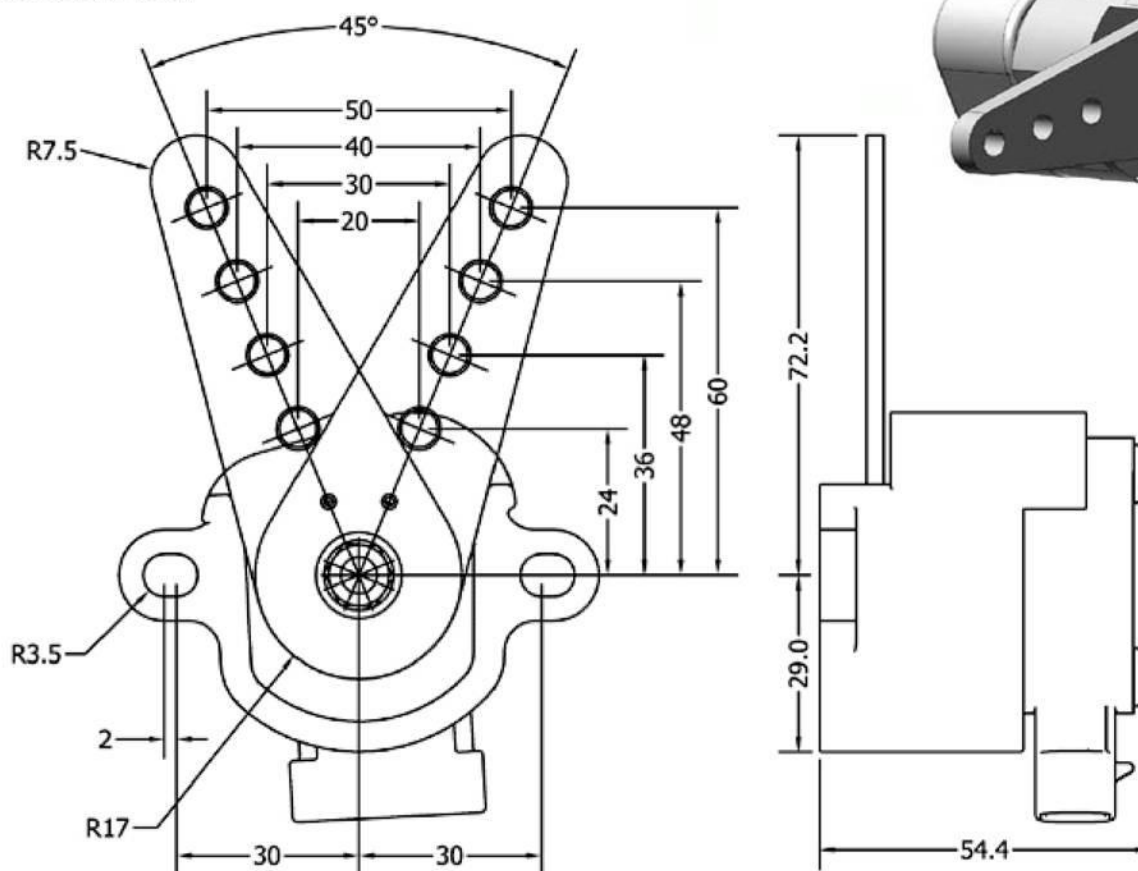

Connector

Technical data

Power supply via electronic controller (+5 VDC $\pm$ 2 %)

Operating temperature -40 °C to +85 °C

Protection rating Sensor IP 67

Installation location Passenger compartment

For additional information please refer to the technical drawing of the specific Part. NO.

Accessories for vehicle wiring harness (not supplied as standard)

Part Number	Product	Description
A2C59512245	Kit D D	elphi Metri Pack 150
	Connector	12066317 (1x)
	Terminal	12103881 (6x)