

4. Z AMPLIFIER AND FOCUSING


PHILIPS 1982 Mod note
for PM 3262 family.

4.1. UNIT 7 (FOCUS UNIT) : /04 AFS.

(V103 22)

Replace neon stabilisation tube V 2029 by an electronic circuit consisting of 2 transistors V 2047, V 2048 (BF 422, 4822 130 44108), 1 zenerdiode BZX 79 C 7V5 (4822 130 30861) and 2 resistors 909 kohm (5322 116 54408) and 86,6 kohm (5322 116 54692).

For circuit diagram and lay-out of this circuit see figure below.

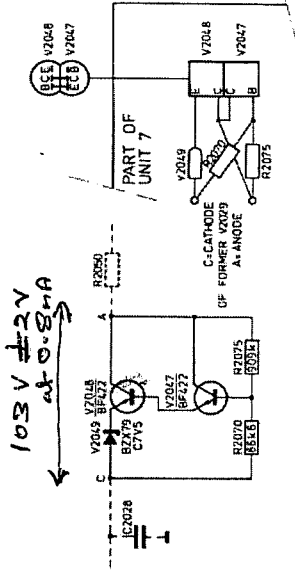

This modification is necessary because the neon stabilisation tube will soon not be available. The modification can also be used in older instruments where V 2029 needs to be replaced.