



EICHHOFF


Vierpol-Funk-Entstörkondensatoren – Klasse X1

Four-pole Radio Interference Suppression Capacitors – Class X1

Condensateurs de déparasitage à 4 pôles – Classe X1




Gehäuse
Encapsulation
Boîtier

MR, IR, KF



Gehäuse
Encapsulation
Boîtier

MRL

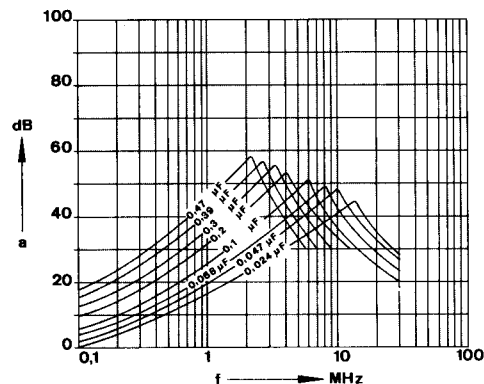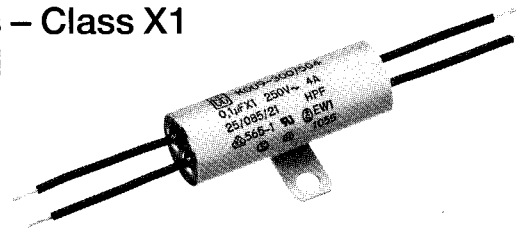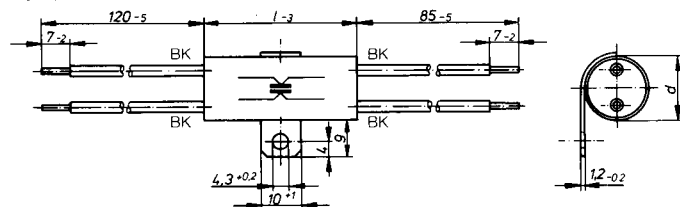

Einfügungsdämpfung
Insertion loss
Affaiblissement d'insertion

Nennkapazität Nominal value Capacité nominale	Gehäuse Encapsulation / Boîtier				Teile-Nr. / Part number / Référence			
	MR, MRL, IR d ± 0,5	I-3	KF d ± 1	I-3	MR	MRL	IR	KF
* 0,024 µF			9	34				K009-000/500
* 0,047 µF			12	34				K009-100/500
* 0,068 µF	14	46	12	44	K009-200/503	K009-200/504	K009-200/501	K009-200/500
* 0,1 µF	16	46	12	44	K009-300/503	K009-300/504	K009-300/501	K009-300/500
* 0,2 µF	18	46	17	44	K009-400/503	K009-400/504	K009-400/501	K009-400/500
0,3 µF	20	53	17	51	K009-410/503	K009-410/504	K009-410/501	K009-410/500
0,39 µF	22	53	20	51	K009-420/503	K009-420/504	K009-420/501	K009-420/500
0,47 µF	25	53	22	51	K009-430/503	K009-430/504	K009-430/501	K009-430/500

Weitere Kapazitätswerte auf Anfrage – Other values upon request – D'autres capacités sur demande

Gehäuse:

IR = Isolierrohr
MR = Metallrohr
MRL = Metallrohr mit Lasche
KF = Kunststoffolienumhüllung

Encapsulation:

IR = plastic case
MR = metal case
MRL = metal case with fixing lug
KF = plastic foil

Boîtier:

IR = tube isolant
MR = tube métallique
MRL = tube métallique avec étrier
KF = feuille plastique

Nennspannung:
Rated voltage:
Tension nominale:

250 V_~

Nennstrom:
Rated current:
Courant nominal:

4 A

Kapazitätsabweichung:
Capacitance tolerance:
Tolérances des capacités:

± 20%

Kondensatorenklasse:
Capacitor class:
Classe de condensateur:

X1

Anwendungsklasse:
Climatic classification:
Classification climatique:

IR, MR, MRL = HPF
KF = HPG

Anschlüsse:

Cu-Litze Typ H05V-K 0,5 mm²,
(mit Prüfzeichen  AWG 18)
Anschlußenden abisoliert

Leads:

stranded copper wire type H05V-K 0,5 mm²,
(with Approval  AWG 18)
ends stripped

Connexions:

toron de cuivre type H05V-K 0,5 mm²,
(avec Homologations  AWG 18)
bouts dénudés

Prüfzeichen:

Approvals:
Homologations:

