

9<sup>th</sup> March 2017

**Low Cost & Profile Frequency Rubidium Standard (LPFRS)**

## High Precision & Performance Source



**Telecom | Navigation | Broadcast | Defense | Instrument**

**Applications**

**Product Characteristics:**

- Small volume : 13 in<sup>3</sup>.
- Frequency offset over temp. range :  $\pm 1 \cdot 10^{-10}$
- Stability :  $1 \cdot 10^{-12}$  / 100 sec.
- Long term stability :  $< 5 \cdot 10^{-10}$  / year
- Low warm-up current :  $< 0.9A$

**Main Features:**

- Very low temperature sensitivity
- Excellent short term stability
- Low power consumption
- Fast warm-up
- Small volume / low profile
- Rb lamp extended life expectancy (20 years)
- Industry standard pin out
- RS 232 interface for centre frequency adjustment and monitoring of the working parameters

**Main Applications:**

- Synchronisation telecommunications (SDH, SONET, SS7, GSM, TETRA)
- Digital Audio Broadcast
- TV transmissions (analog & digital)
- Military communications
- Navigation
- Instrumentation
- Tracking and guidance control

**Parameters accessible through RS232:**

The working and monitoring parameters of the LPFRS are accessible for read and write operations through the serial RS-232 port (1200 bits/sec., no parity, 1 start bit, 8 data bits, 1 stop bit).

There are three different commands, which are:

*M*, *Cxx* and *Fxx* followed by a carriage return.

*M*: monitors the basic factory adjustments of the atomic clock.

The returned answer looks like

*HH GG FF EE DD CC BB AA* <CR>

Where each returned byte is an ASCII coded hexadecimal value, separated by a <Space> character. All parameters are coded at full scale.

*HH*: DC-Voltage of the photocell (5V to 0V)

*GG*: peak voltage of Rb-signal (0 to 5V)

*FF*: not used

*EE*: varactor control voltage (0 to 5V)

*DD*: Read-back of the user provided frequency adjustment voltage on pin 2 (0 to 5V)

*CC*: Rb-lamp heating current (500mA to 0mA)


*BB*: Rb-cell heating current (500mA to 0mA)

*AA*: 90MHz power control signal (0 to 5V)

*Cxx*: output frequency correction through the synthesizer, by steps of  $1 \times 10^{-9}$ , where *xx* is a signed 8 bits word. This value is automatically stored in a EEPROM.

*Fxx*: output frequency correction through C-field, by steps of  $1 \times 10^{-11}$ , where *xx* is a signed 8 bits word.

**Package:** (all dimensions in inch)

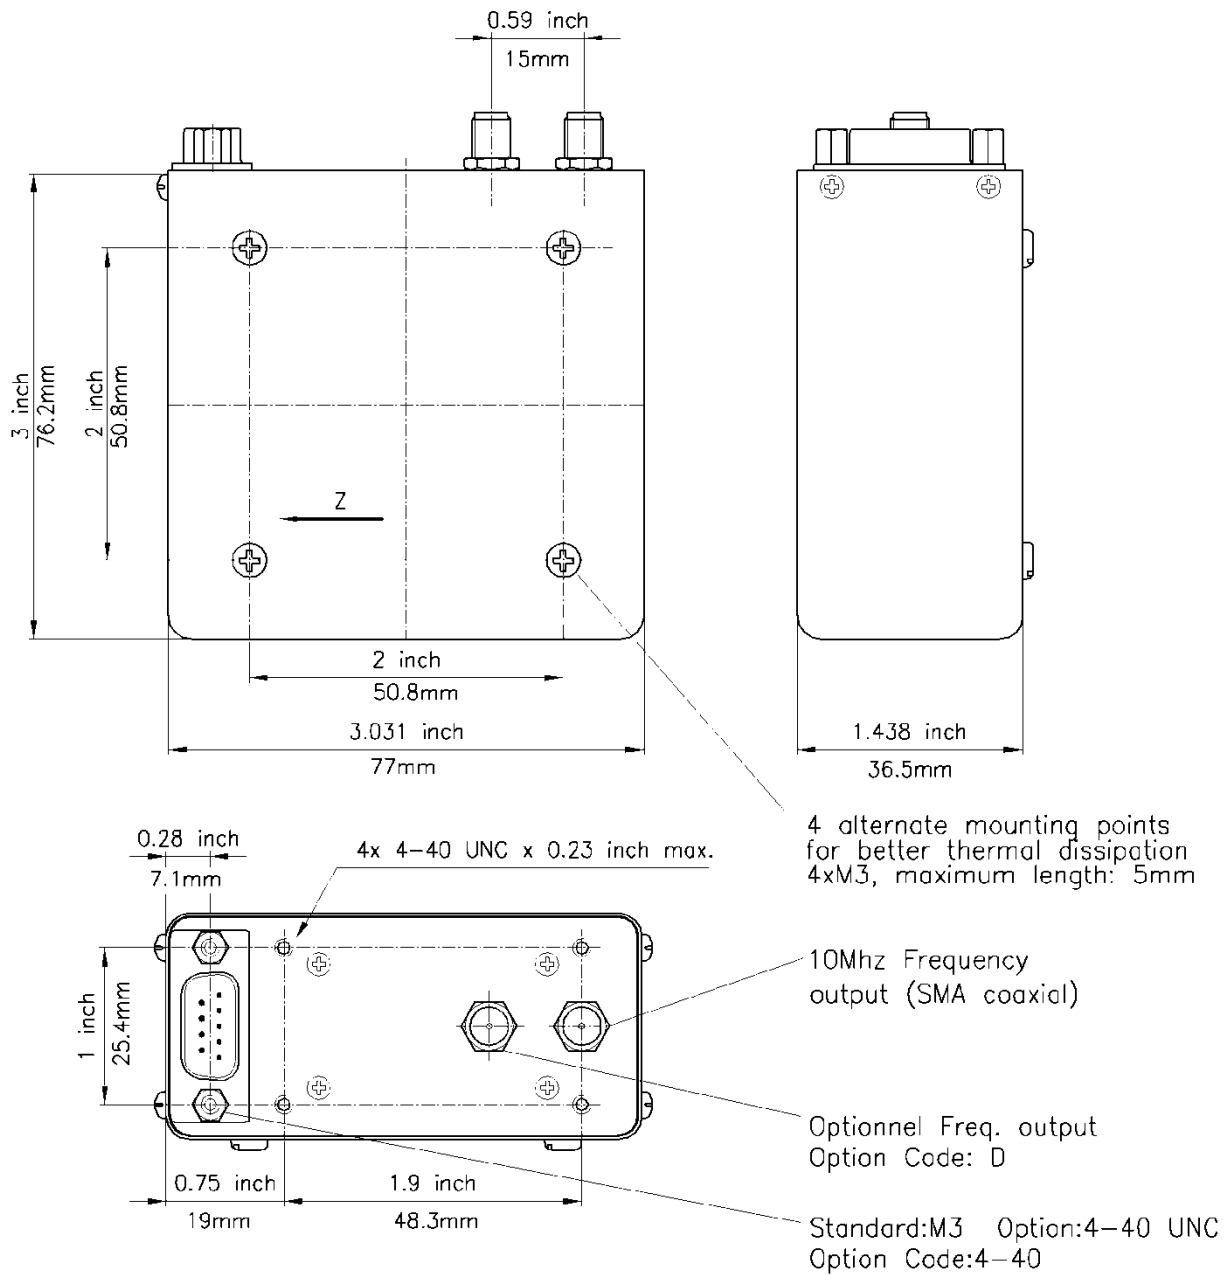

**Connector front view:**

**D-Sub 9 pins male**



| PIN | FUNCTION                    |
|-----|-----------------------------|
| 1   | +24V (+12V)                 |
| 2   | 0V (GND)                    |
| 3   | Lock indicator (open coll.) |
| 4   | Vref (5V hi-stability ref.) |
| 5   | GND                         |
| 6   | TxD (RS232 transmit,TTL)    |
| 7   | GND                         |
| 8   | Frequency adjust (0 to 5V)  |
| 9   | RxD (RS232 receive,TTL)     |

**SPECIFICATIONS****ELECTRICAL:**

| Type  | LPFRS-01  |  |   |
|---|---|--|---|
|   | Standard version  |  | Options   |
| Frequency Accuracy @ Shipment   | < 5E-11 (+25°C), typical  |  |   |
| Frequency   | 10 MHz  |  | Optional 20 MHz, 5 MHz  |
| Frequency change within operating temperature range<br>(Thermal chamber with air flow)  | <= ± 1 x 10 <sup>-10</sup><br>over -5°C to +55°C<br>< 2 x 10 <sup>-10</sup> over 0-65°C   |  | -0 to 65°C( <b>option code E65</b> )<br>-30 to 70°C( <b>option code E70</b> )<br>-30 to 60°C( <b>option code E</b> )  |
| Long term stability (Measured after 3 months of continuous operation)   | < 5x10 <sup>-11</sup> / month<br>(typical: 3x10 <sup>-11</sup> / month)   |  | < 3x10 <sup>-11</sup> / month<br>< 2x10 <sup>-10</sup> / year ( <b>option code A</b> )<br>< 1x10 <sup>-9</sup> / 10 years<br>(typical: ±1x10 <sup>-11</sup> / month)  |
| Short term stability  | 2 x 10 <sup>-11</sup> / 1 s<br>7 x 10 <sup>-12</sup> / 10 s<br>2 x 10 <sup>-12</sup> / 100 s                                    |  | Improved short term stability<br>( <b>option code S</b> )<br>1 x 10 <sup>-11</sup> / 1 s<br>3 x 10 <sup>-12</sup> / 10 s<br>1 x 10 <sup>-12</sup> / 100 s   |
| Phase noise (10 MHz)  | -70 dBc/Hz @ 1 Hz<br>-80 dBc/Hz @ 10 Hz<br>-115 dBc/Hz @ 100 Hz<br>-135 dBc/Hz @ 1kHz<br>-140 dBc/Hz @ 10 kHz                   | @ 10 MHz<br>-80 dBc/Hz @ 1 Hz<br>-100 dBc/Hz @ 10Hz<br>-130 dBc/Hz @ 100 Hz<br>-140 dBc/Hz @ 1kHz<br>-150 dBc/Hz @ 10 kHz<br>( <b>option code Q3</b> ) | @ 5 MHz<br>-109 dBc/@ 10 Hz<br>-139 dBc @ 100Hz<br>-149 dBc @ 1 kHz<br>-156 dBc @ 10 kHz<br>-161 dBc @ 100 kHz<br>( <b>option code Q3/X</b> )   |
| Frequency retrace (in stable temperature, gravity, pressure and magnetic field conditions)  | < 5 x 10 <sup>-11</sup> within 1 h after 24 h off   |  |   |
| Warm-up time [minutes]  | standard version<br>5 x 10 <sup>-10</sup> after 15' at +25°C  |  | fast warm-up ( <b>option code F</b> )<br>lock after 7' at +25°C   |
| Analog frequency adjustment<br>For stable operation, an external voltage adjust. value shall be applied (DC voltage of 0 to 5V) on pin 8.<br>Typically: the cursor pin of a 10kΩ variable resistor connected between pins 2 and 4 (GND & Vref) can provide this adjustment voltage.(refer to op. manual). | 2.5 x 10 <sup>-9</sup> ±20%   |  | 5 x 10 <sup>-9</sup> ± 20% ( <b>option code O</b> )<br>3 x 10 <sup>-8</sup> ± 20% ( <b>option code O2</b> )<br>6 x 10 <sup>-9</sup> ± 20% ( <b>option code O1</b> )<br>Precise analog frequency tuning<br>( <b>option code GI1</b> )<br>2.5 to 3 x 10 <sup>-9</sup> |
| Digital frequency adjustment through serial RS-232 port.  | ±1.2 x 10 <sup>-7</sup> (resolution: 1 x 10 <sup>-9</sup> )<br>2.5 x 10 <sup>-9</sup> (resolution: 1 x 10 <sup>-11</sup> ) ±20% |  |   |
| Output level  | sinewave 0.5 Vrms ±10%, 50 Ω  |  | 12-15dbm / 50 Ω ( <b>option code 13DB</b> )   |
| >Number of output (s)   | Single output   |  | Dual output ( <b>option code D</b> )  |
| Return loss   | -20 dB  |  |   |
| Harmonics   | < -25dBc  |  | @ 10MHz<br>< -40 dBc<br>( <b>option code X</b> )  |
| Spurious f <sub>0</sub> ± 100kHz  | < -80dBc  |  | @ 5MHz<br>< -40 dBc   |
| Subharmonics  | < -60dBc  |  | < -110 dBc<br>( <b>option code X</b> )<br>< -120 dBc  |
| Supply voltage<br>Max Power Supply Ripple   | <b>24V option</b> : 18 to 32 V  |  | <b>12V option</b> :<br>11.2 to 17 V<br><b>28V option</b><br>22.5V to 32 V   |
| Supply voltage sensitivity  | < 50 mV peak to peak (from 1Hz to 1 MHz frequency band)   |  | < 1 x 10 <sup>-11</sup> for ±10% for 28V option only  |

| Type  | LPFRS-01  |                             |   |                           |
|---|---|-----------------------------|---|---------------------------|
|   | Standard version  |                             | Options   |                           |
| Input power   | warm up: typical <20 W at 12 V<br>typical <25 W at 24 V<br>-5°C: <13 W<br>+25°C: <10 W<br>+50°C: <7 W   |                             | warm up: <32 W<br><b>(with option code F or E)</b><br>warm up: <40 W<br><b>(with option code 28V/F or 28/E)</b> |                           |
| Electrical Protection<br>power +24V (12V)<br>RF output<br>TxD output<br>5V (Vref) output<br>RxD input<br>Frequency adjust input<br>Lock indicator | An internal diode protects against reverse polarity connection<br>ESD and short-cut protected<br>ESD and short-cut protected<br>ESD and short-cut protected<br>ESD protected<br>ESD protected<br>Over current protected |                             |   |                           |
| Lock Indicator (pin 3)<br>L = open collector<br>B = TTL   | Standard<br>Open<br>Closed  | Option LR<br>Closed<br>Open | Option B<br>< 0.4V<br>5V  | Option BR<br>5V<br>< 0.4V |
|   | locked  | unlocked                    |   |                           |

**ENVIRONMENTAL**

|  |   |   |
|--|---|---|
| Magnetic field sensitivity                                   | < 2 x 10 <sup>-11</sup> / Gauss in X and Y axis<br>< 1 x 10 <sup>-10</sup> / Gauss in Z axis                  | Low magnetic sensitivity<br><b>(Option code LM)</b><br>< 2 x 10 <sup>-11</sup> / all axis     |
| Storage Temperature  | - 55°C to + 85°C  |   |
| Operating Temperature  | -25°C to +55°C (55°C is the maximal temperature of the thermal chamber with air flow around the unit)         |   |
| Overall Environment Effects *<br>(Altitude,Vibration,Shocks) | Meets or exceeds MIL-T-28800B for Type III, class 5 equipment<br>+ MIL Std 810 + 516.2 /160g, 4ms, half sinus |   |
| Humidity   | RTCA/DO-160C hot humidity,<br>35°C, 95% relative humidity   |   |
| Helium concentration sensitivity                             | < 1 x 10 <sup>-10</sup> per ppm of Helium concentration change  |   |
| g-tip-over test  | 2 x 10 <sup>-10</sup> / g on worst sensitive axis   | Low magnetic sensitivity<br><b>(Option code LM)</b><br>< 5 x 10 <sup>-11</sup> / g / all axis |
| Vibration Sensitivity  | -   | < 1 x 10 <sup>-9</sup> / g / <b>(Option code Q3)</b>  |
| Conformal Coating  | -   | <b>Option code CC</b>   |

**PHYSICAL**

|                |   |   |
|----------------|---|---|
| Size           | 76 x 77 x 36.5mm. (3.0 x 3.03 x 1.44 inches)                                    |   |
| Weight         | 290 g max. ( 0.64 Lbs. max)   |   |
| Volume         | 1/5 liter ( 13 cubic inches)  |   |
| Connector      | 9 male contacts<br>Mate with ITT Cannon Series DB9 +<br>SMA coaxial – M3 mating | UNC mating<br><b>(Option code 4-40)</b> |
| Mounting Drill | Standard M3 mating  |   |
| Warranty       | Electronics : 1 year; Lamp & cell : 20 years                                    |   |

**Ordering Information:**

