



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[CR470-E3](#)

[CR180](#)

[CR200](#)

[CR220](#)

[CR300](#)

[CR330](#)

[CR430](#)

[CR470-E3](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR


Cette fiche technique est
présentée par le fabricant



Current Regulator Diodes

| | | | |
|--------------|--------------|--------------|--------------|
| CR160 | CR220 | CR300 | CR390 |
| CR180 | CR240 | CR330 | CR430 |
| CR200 | CR270 | CR360 | CR470 |

| PRODUCT SUMMARY | | | | | |
|-----------------|-------------------------|-------------------------|-------------|-------------------------|-------------------------|
| Part Number | Typ I _F (mA) | Min P _{OV} (V) | Part Number | Typ I _F (mA) | Min P _{OV} (V) |
| CR160 | 1.60 | 100 | CR300 | 3.00 | 100 |
| CR180 | 1.80 | 100 | CR330 | 3.30 | 100 |
| CR200 | 2.00 | 100 | CR360 | 3.60 | 100 |
| CR220 | 2.20 | 100 | CR390 | 3.90 | 100 |
| CR240 | 2.40 | 100 | CR430 | 4.30 | 100 |
| CR270 | 2.70 | 100 | CR470 | 4.70 | 100 |



FEATURES

- Two-Lead Hermetic Package
- Guaranteed Tight $\pm 10\%$ Tolerance
- Operation from 1 V (CR160) to 100 V
- Excellent Temperature Stability

BENEFITS

- Simple Series Circuitry, No Separate Voltage Source
- Tighter Guaranteed Circuit Performance
- Excellent Performance in Low-Voltage/Battery Circuits and High-Voltage Spike Protection
- High Circuit Stability vs. Temperature

APPLICATIONS

- Constant-Current Supply
- Current-Limiting
- Timing Circuits


DESCRIPTION

The CR160 series is a family of $\pm 10\%$ range current regulators designed for demanding applications in test equipment and instrumentation. These devices combine a JFET with an integrated resistor to produce a single two-leaded device which is extremely simple to operate. With nominal current ranges from 1.60 mA to 4.70 mA, this series



will meet a wide array of design requirements.

The TO-206AA hermetically sealed package is available with military processing per MIL-S-19500 (see Military Information).

SCHEMATIC DIAGRAM



APPLICATIONS



For applications information see AN103.



ABSOLUTE MAXIMUM RATINGS

Peak Operating Voltage 100 V
 Reverse Current 50 mA
 Thermal Resistance (θ_{JA}) 417°C/W

Storage Temperature -55 to 200°C
 Power Dissipation^a 300 mW

Notes:

a. Derate 2.4 mW/°C above 25°C

| SPECIFICATIONS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED) | | | | | | |
|---|----------|---------------------------------------|--------|------------------|-----|------|
| Parameter | Symbol | Test Conditions | Limits | | | Unit |
| | | | Min | Typ ^a | Max | |
| Peak Operating Voltage ^b | P_{OV} | $I_F = 1.1 I_{F(max)}$ | 100 | 135 | | V |
| Reverse Voltage | V_R | $I_R = 1\text{ mA}$ | | 0.8 | | V |
| Capacitance | C_F | $V_F = 25\text{ V}, f = 1\text{ MHz}$ | | 6 | | pF |

| Part Number | Regulator Current ^c (I_F) | | | Dynamic Impedance ^d (Z_d) | | Knee Impedance (Z_k) | | Limiting Voltage ^e (V_L) | | Temperature Coefficient (θ_1) |
|-------------|---|------|-------|---|------------------|-----------------------------|------------------|--|------------------|--|
| | $V_F = 25\text{ V}$ | | | $V_F = 25\text{ V}$ | | $V_F = 6\text{ V}$ | | $I_F = 0.8 I_{F(min)}$ | | $V_F = 25\text{ V}$ $0^\circ\text{C} \leq T_A \leq 100^\circ\text{C}$ |
| | Min | Nom | Max | Min | Typ ^a | Min | Typ ^a | Max | Typ ^a | ppm/°C |
| CR160 | 1.440 | 1.60 | 1.760 | 0.475 | 1.10 | 0.092 | 0.40 | 1.65 | 0.70 | 1000 |
| CR180 | 1.620 | 1.80 | 1.980 | 0.420 | 1.00 | 0.074 | 0.34 | 1.75 | 0.75 | 650 |
| CR200 | 1.800 | 2.00 | 2.200 | 0.395 | 0.90 | 0.061 | 0.28 | 1.85 | 0.80 | 300 |
| CR220 | 1.980 | 2.20 | 2.420 | 0.370 | 0.83 | 0.052 | 0.25 | 1.95 | 0.85 | 100 |
| CR240 | 2.160 | 2.40 | 2.640 | 0.345 | 0.76 | 0.044 | 0.22 | 2.00 | 0.90 | 0 |
| CR270 | 2.430 | 2.70 | 2.970 | 0.320 | 0.70 | 0.035 | 0.19 | 2.15 | 0.95 | -200 |
| CR300 | 2.700 | 3.00 | 3.300 | 0.300 | 0.65 | 0.029 | 0.16 | 2.25 | 1.00 | -400 |
| CR330 | 2.970 | 3.30 | 3.630 | 0.280 | 0.60 | 0.024 | 0.14 | 2.35 | 1.05 | -550 |
| CR360 | 3.240 | 3.60 | 3.960 | 0.265 | 0.54 | 0.020 | 0.13 | 2.50 | 1.10 | -730 |
| CR390 | 3.510 | 3.90 | 4.290 | 0.255 | 0.47 | 0.017 | 0.12 | 2.60 | 1.17 | -820 |
| CR430 | 3.870 | 4.30 | 4.730 | 0.245 | 0.40 | 0.014 | 0.10 | 2.75 | 1.25 | -1000 |
| CR470 | 4.230 | 4.70 | 5.170 | 0.235 | 0.35 | 0.012 | 0.09 | 2.90 | 1.32 | -1125 |

Notes:


- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Peak voltage at which $I_F = 1.1 I_{F(max)}$.
- c. Pulse test—steady state currents may vary.
- d. Pulse test—steady state impedances may vary.
- e. Min V_F required to insure $I_F = 0.8 I_{F(min)}$.

NKO




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)


Output Current vs. Forward Voltage

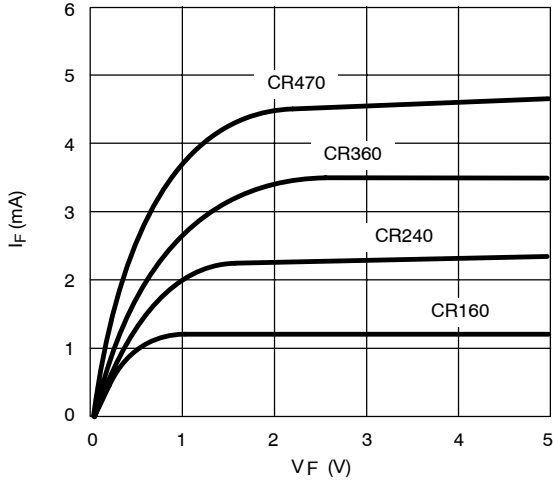


Output Current vs. Forward Voltage

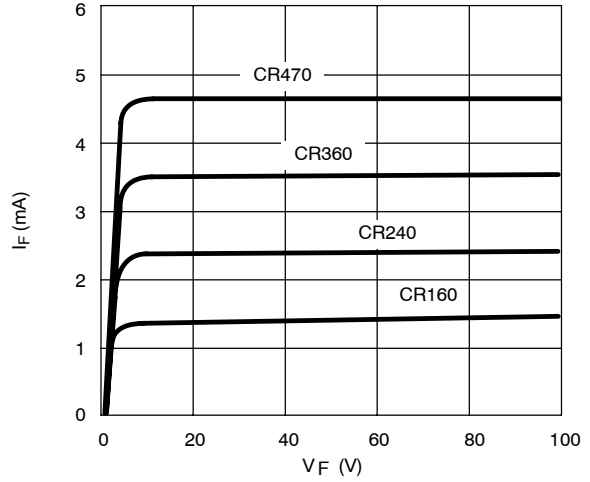


Limiting Current vs. Temperature

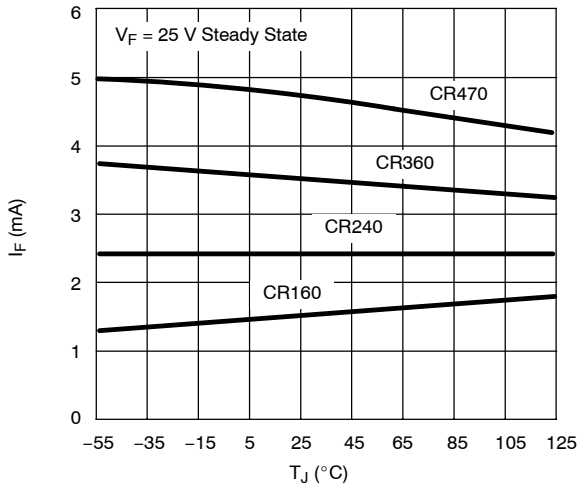


Knee Impedance vs. Regulator Current

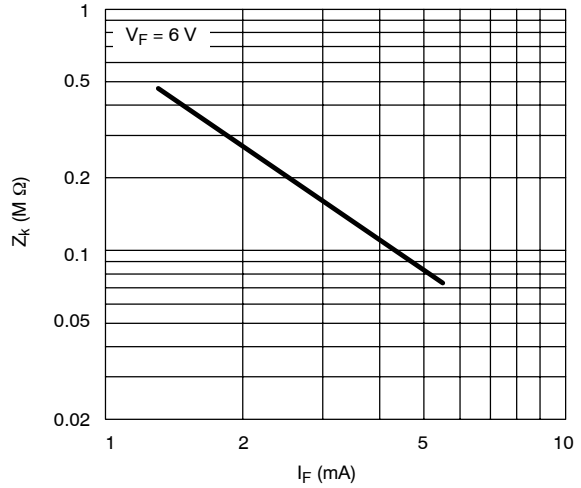





Dynamic Impedance vs. Regulator Current

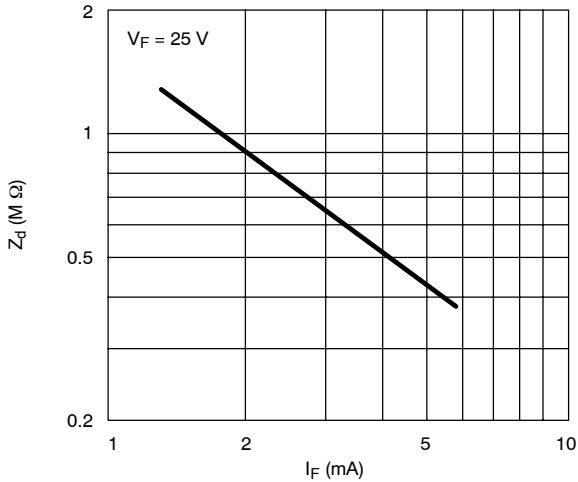


Limiting Voltage @ 0.8 I_F vs. Regulator Current

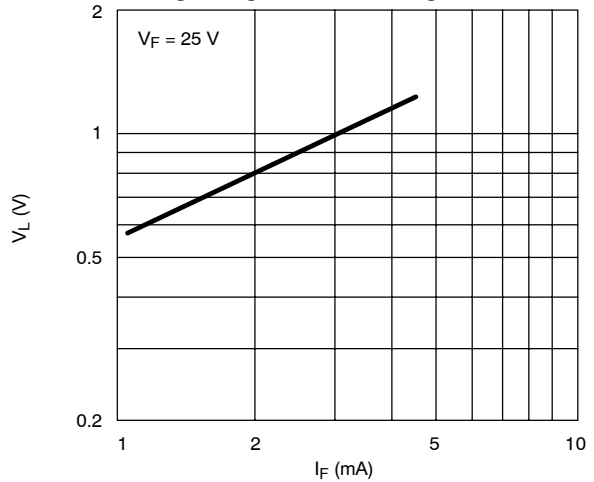

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

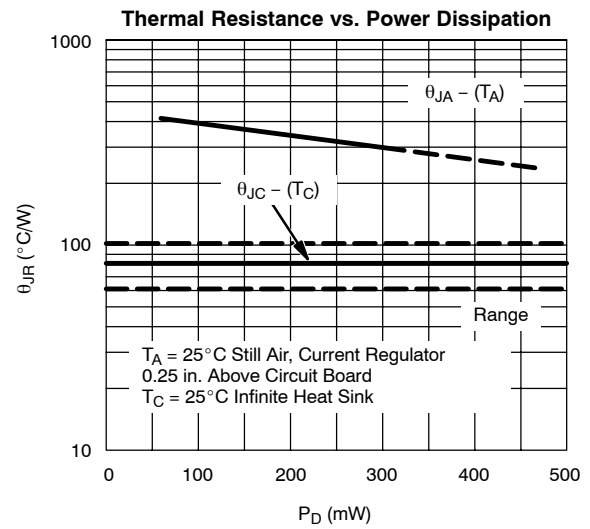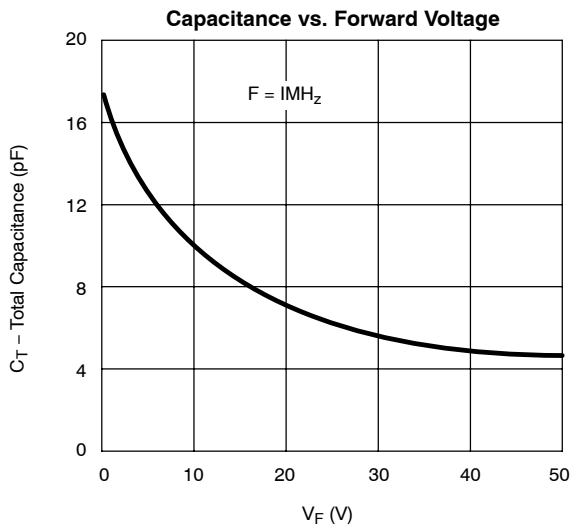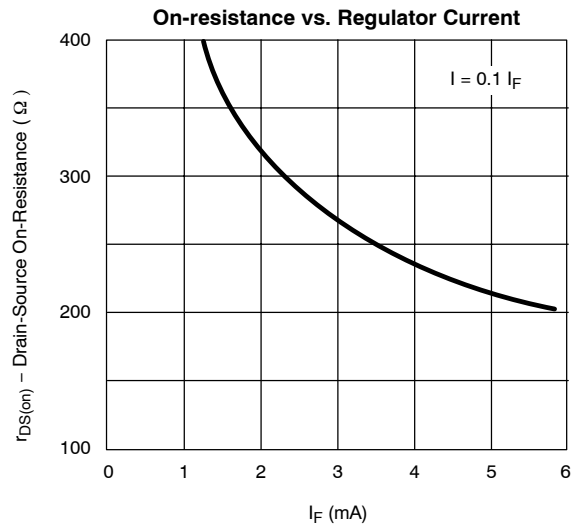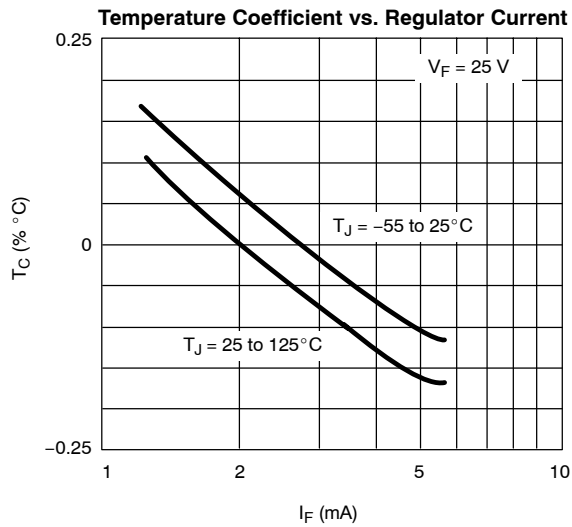

CURRENT REGULATOR DIODE V-1 CHARACTERISTIC

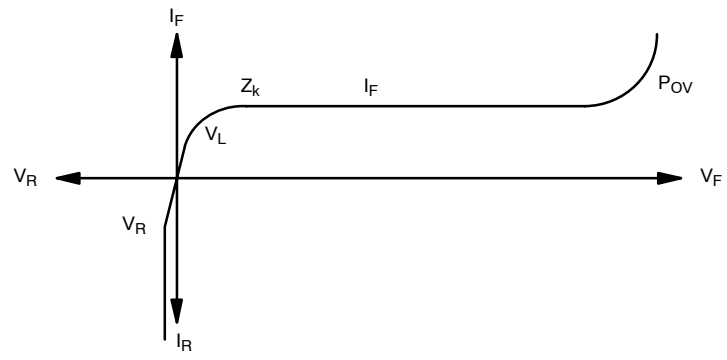



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[CR470-E3](#)

[CR180](#)

[CR200](#)

[CR220](#)

[CR300](#)

[CR330](#)

[CR430](#)

[CR470-E3](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant