PRESIDENT

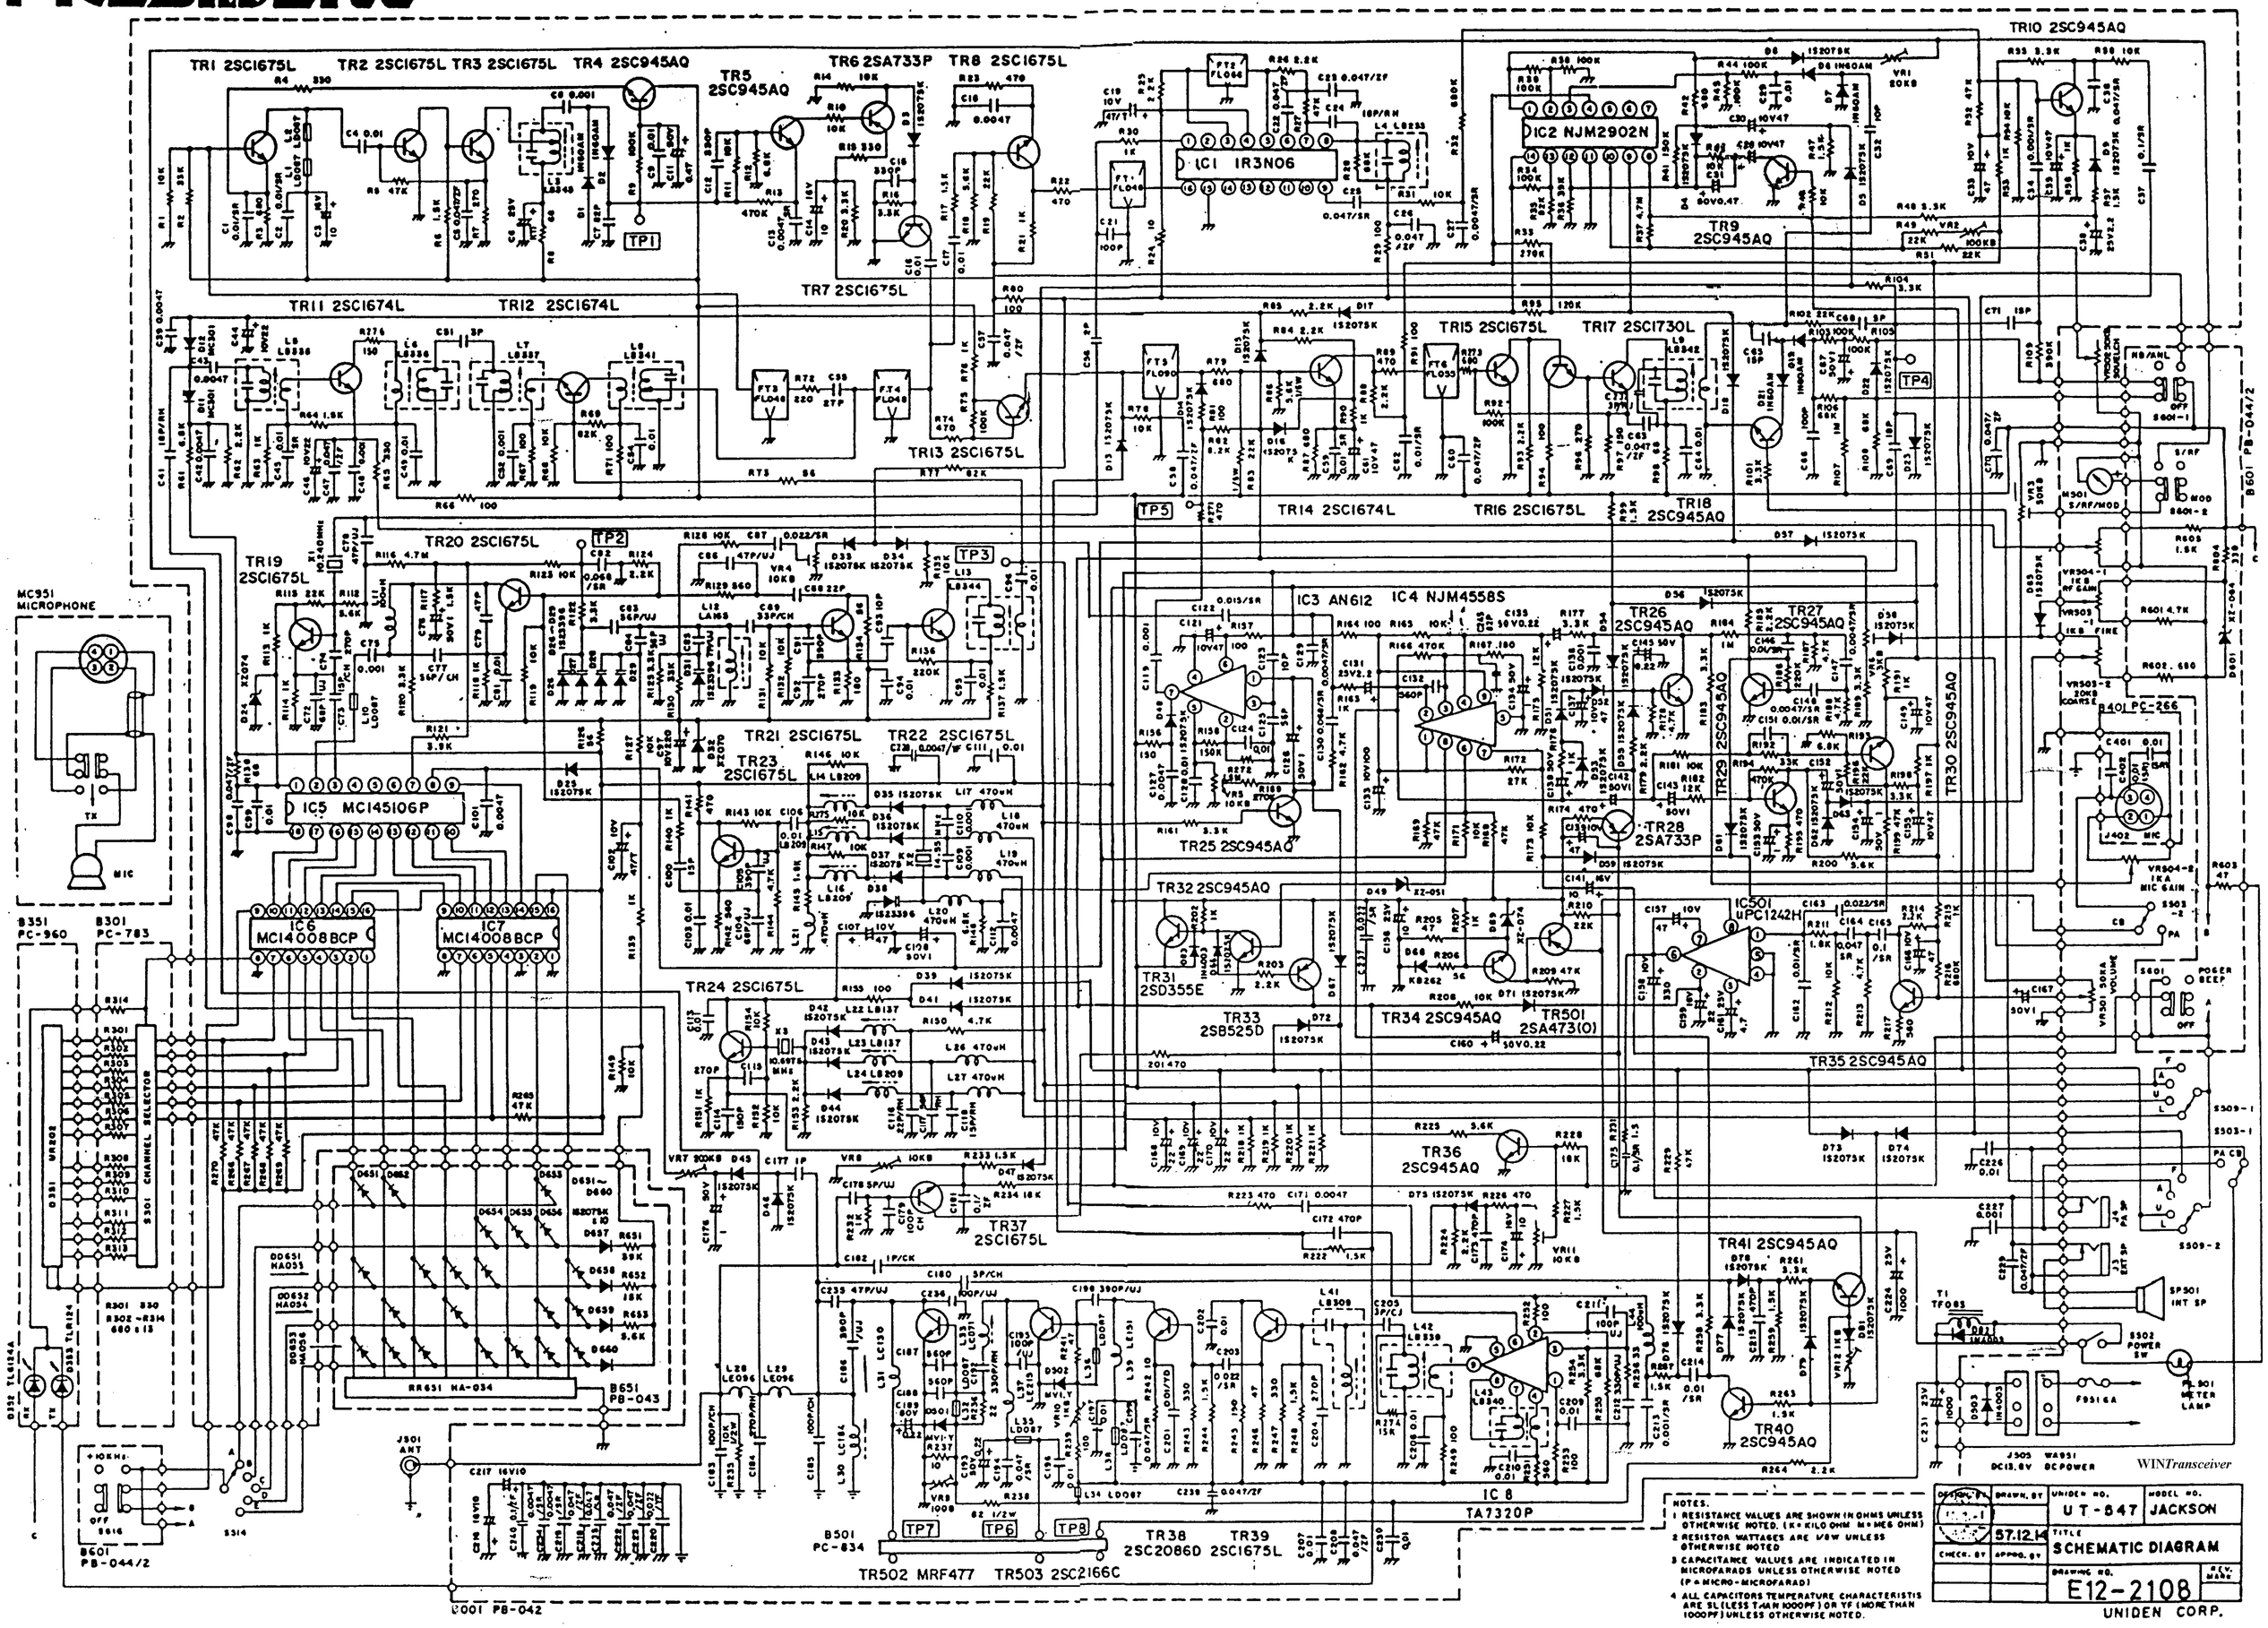

NOTES.
1 RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K = KILO OHM M = MEG OHM)
2 RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED
3 CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P = MICRO-MICROFARAD)
4 ALL CAPACITORS TEMPERATURE CHARACTERISTIS ARE SL (LESS THAN 1000PF) OR YF (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.

DESIGN. BY	DRAWN. BY	UNIDEN NO.	MODEL NO.
		UT-847	JACKSON
	57.12.14	TITLE SCHEMATIC DIAGRAM	
CHECK. BY	APPROV. BY		
		DRAWING NO. E12-2108	REV. MARK

UNIDEN CORP.