



# NTC THERMISTORS: TYPE RA

## GLASS ENCAPSULATED BEAD

### DESCRIPTION:

Type RA are directly heated bead type thermistors primarily intended for applications where high sensitivity to electrical power input is required.

The thermistor element consists of a very small bead of thermistor material, approximately 0.25mm (0.010 in.) in diameter, which is integrally formed on two parallel platinum alloy wires. These wires are then welded to cunife lead wires and the whole assembly is sealed in an evacuated glass envelope.


Applications of these thermistors include amplitude control, voltage stabilization, time delay and power measurement.



### DATA:

Resistance tolerance at 25°C..... ±20%  
 B value tolerance 25-85°C..... ± 5%  
 $T_{Amax}$ ..... 155°C  
 $T_{Bmax}$ ..... 225°C  
 $P_{max}$ ..... 2.95 mW at 25°C  
 $k$ ..... 12.5  $\mu W/^{\circ}C$  between 25 and 100°C  
 ..... 16.0  $\mu W/^{\circ}C$  between 100 and 225°C  
 $\tau$ ..... 1.1 s  
 Weight..... 0.5g

### DIMENSIONS:

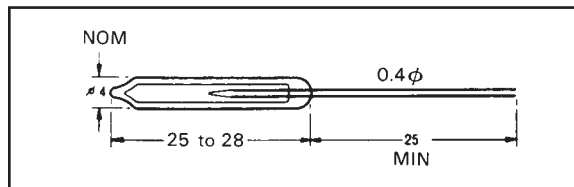

### POWER DERATING:

Derate linearly to 1 mW at 155°C

Code	$R_{20}$ $\Omega$	$R_{25}$ $\Omega$	$R_{min}$ $\Omega$	$B_{25-85}$ K
RA52	500	430	18	2650
RA13	1k	852	29	2800
RA23	2k	1.7k	44	3000
RA53	5k	4.2k	79	3250
RA14	10k	8.2k	120	3450
RA24	20k	16.3k	198	3600
RA54	50k	4.01k	350	3850
RA15	100k	79.3k	540	4050
RA25	200k	157k	890	4200

**BOWTHORPE THERMOMETRICS**  
 Crown Industrial Estate, Priorswood Road  
 Taunton, Somerset TA2 8QY UK  
 Tel +44 (0) 1823 335200  
 Fax +44 (0) 1823 332637


**THERMOMETRICS, INC.**  
 808 US Highway 1  
 Edison, New Jersey 08817-4695 USA  
 Tel +1 (732) 287 2870  
 Fax +1 (732) 287 8847

**KEYSTONE THERMOMETRICS CORPORATION**  
 967 Windfall Road  
 St. Marys, Pennsylvania 15857-3397 USA  
 Tel +1 (814) 834 9140  
 Fax +1 (814) 781 7969



# NTC THERMISTORS: TYPE RA

## GLASS ENCAPSULATED BEAD

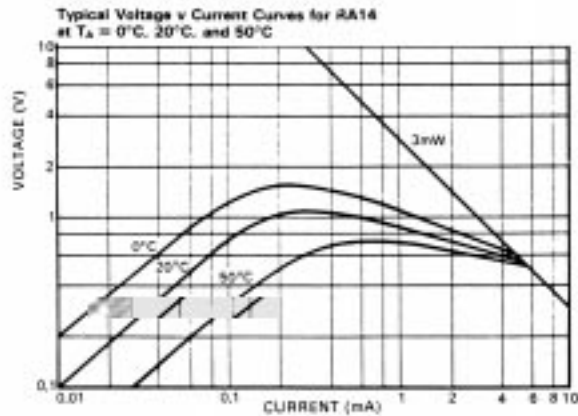

### STORAGE:


The normal care required for electronic components should be exercised.

### DISPOSAL:

No special hazards are involved in disposal. Incineration of thermistors is not recommended due to the emission of toxic fumes from epoxy coated devices or the shattering of glass and/or ceramic with possible hazard from hot jagged material.

### PHYSICAL FORM:

The wire ends should not be bent nearer than 3mm to the glass body of the thermistor.

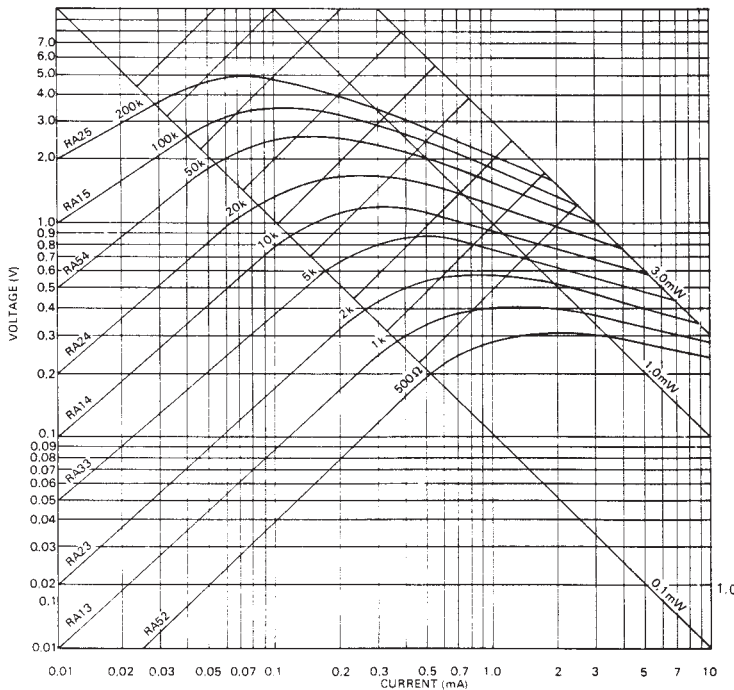

### OPERATING:

Thermistors are designed to be intrinsically safe components provided they are operated within the rated voltages or currents and inside the recommended temperature range.

**BOWTHORPE THERMOMETRICS**  
Crown Industrial Estate, Priorswood Road  
Taunton, Somerset TA2 8QY UK  
Tel +44 (0) 1823 335200  
Fax +44 (0) 1823 332637

**THERMOMETRICS, INC.**  
808 US Highway 1  
Edison, New Jersey 08817-4695 USA  
Tel +1 (732) 287 2870  
Fax +1 (732) 287 8847

**KEYSTONE THERMOMETRICS CORPORATION**  
967 Windfall Road  
St. Marys, Pennsylvania 15857-3397 USA  
Tel +1 (814) 834 9140  
Fax +1 (814) 781 7969