


Bode plot - Reflection

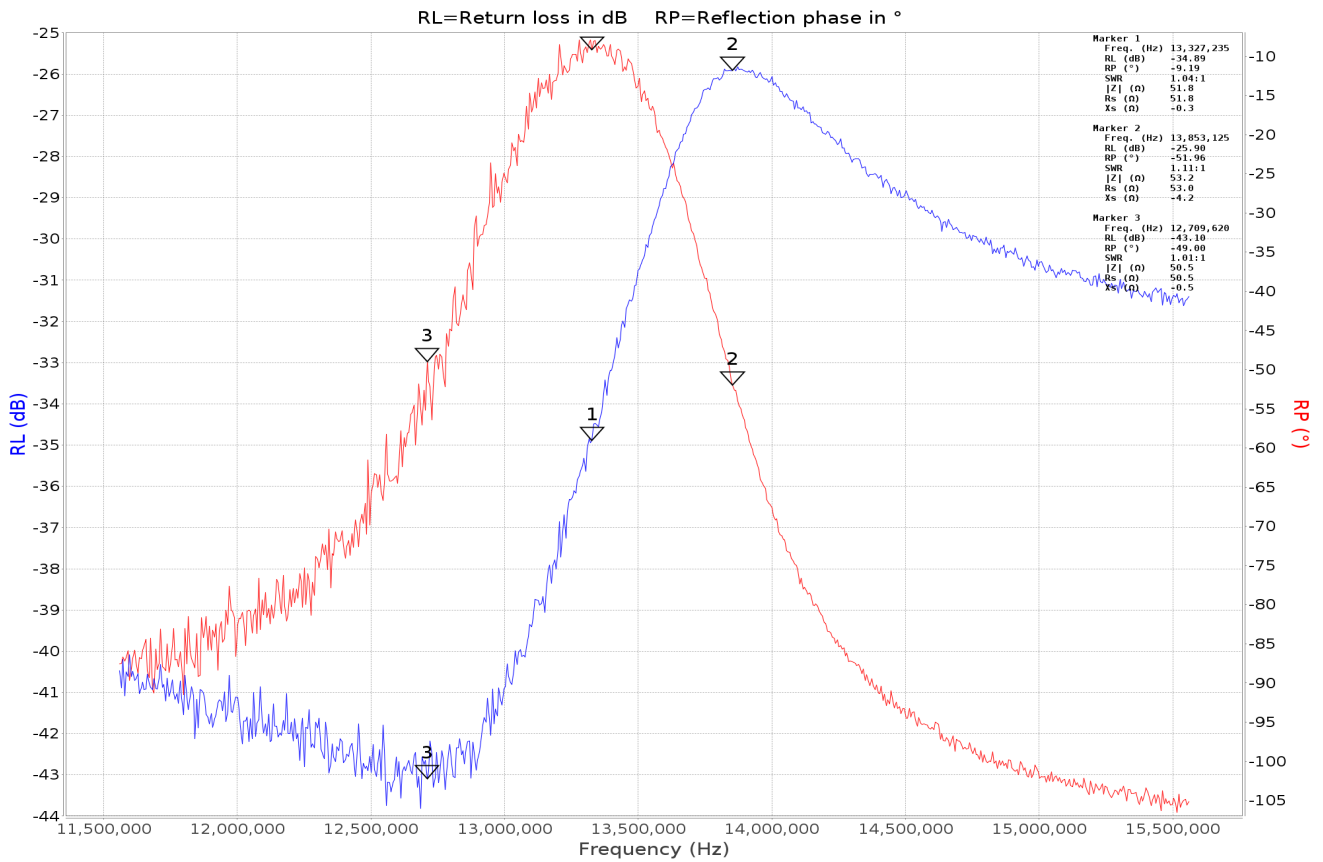

Marker	Freq. (Hz)	RL (dB)	RP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	13,327,235	-34.89	-9.19	51.8	51.8	-0.3	-0.3	1.04:1
2	13,853,125	-25.90	-51.96	53.2	53.0	-4.2	-4.6	1.11:1
1-2	525,890	8.98	42.76	1.4	1.2	3.9	0.0	---
3	12,709,620	-43.10	-49.00	50.5	50.5	-0.5	-0.6	1.01:1

Comment:

Analyser: miniVNA Tiny (Reflection mode)
 Scan range: 11,560,000 - 15,559,430 Hz; 655 samples
 Calibration: "card loop REFL.cal"; 31500 samples
 Scan made by leo on 2020/12/02 at 10:23:37