



Best.-Nr. 1707651

bis 707694

TYPES
ST 1033 E
ST 1034 E**Single key - 1 pole**


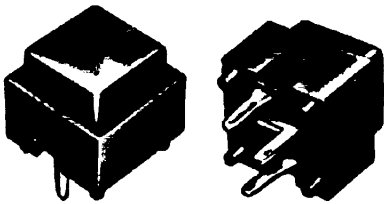
For electronic switching control in entertainment and household electronic equipment, telecommunication engineering, industrial electronic apparatuses, etc.

MECHANICAL DATA

Permissible force at end stop:	50 N (1 min. max)
Contact bouncing:	≤ 0.5 ms
Life:	$\geq 1.000.000$ cycles
Weight:	~ 1 g

Type	Travel mm	Operating force N
ST 1033E	$0,4 \pm 0,1$	$0,8 \div 2,5$
ST 1034E	$0,6 \pm 0,1$	$1,2 \div 3,5$

Standard: ST 1033E



Button colour

Standard: black

Optional: light grey, red, yellow, blue, green

Case colour: black




LED socket can be fitted; see at p. 212.

FEATURES:

- Short travel
- Momentary switch with "click-effect"
- Self-cleaning contact
- Suitable for keyboards arrangement

ELECTRICAL DATA

Breaking capacity:	20 mA - 30 VDC
Contact resistance:	≤ 25 m Ω
Insulation resistance:	≥ 1 G Ω
Rated temperature range:	-20°C to +70°C

viewed on
component side